


BELT DRIVEN SINGLE-STAGE COMPRESSORS


- Belt driven, single stage, two cylinder compressors with cast-iron cylinder for both the skilled craftsman and hobby worker alike.

- Compact machines suitable for use even in tight spaces.
- Simple, user friendly controls.
- Sturdy wheels and comfortable handle ensure easy transport.
- The 100-litre models feature a front caster wheel to simplify transportation.

B 251E/9/50

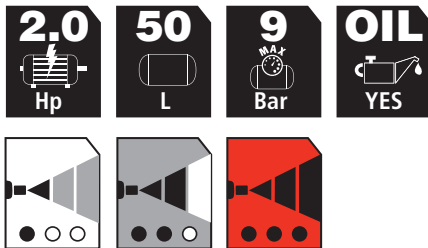

B 345E/9/100

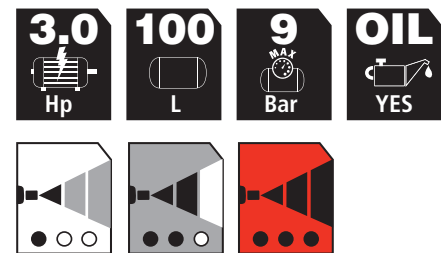


Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
B 251E/9/50	28DC4045TN604	B2800	50	2/1,5	2	9/131	SI	1250	255/9	230/50	49,5/109,1	770x340x670	8016738755398
B 345E/9/50	28DC5045TN605	B2800B	50	3/2,2	2	9/131	SI	1480	330/11,6	230/50	49,7/109,6	770x340x670	8016738755404
B 251E/9/100	28FC4045TN606	B2800	100	2/1,5	2	9/131	SI	1250	255/9	230/50	59/130	950x390x770	8016738755411
B 345E/9/100	28FC5045TN607	B2800B	100	3/2,2	2	9/131	SI	1480	330/11,6	230/50	59,2/130,5	950x390x770	8016738755428

BELT DRIVEN SINGLE-STAGE COMPRESSORS


- Traditional range of safe, versatile belt-driven compressors designed for long durability and low air consumption.
- Compatible with a vast range of pneumatic tools.
- Available on tanks from 50 to 270 litres.
- Pump with large finned surfaces for better cooling.
- Simple, user friendly controls.
- Large wheels and sturdy handle ensure easy transport.
- Available with three phase electric motor for heavy duty and extensive use.



B 251/10/50

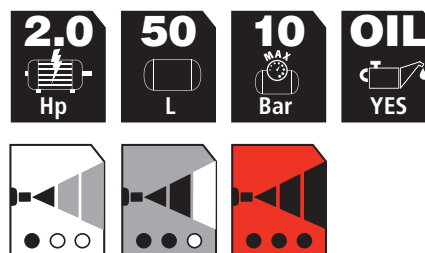

B 251/10/100

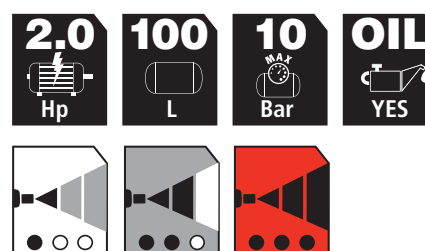

Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	WxDxH	
B 251/10/50	28DC404STN086	B2800	50	2/1,5	2	10/145	SI	1250	255/9	230/50	51/112,4	800x390x750	8016738753844
B 251/10/100	28FC404STN087	B2800	100	2/1,5	2	10/145	SI	1250	255/9	230/50	68/149,9	1025x435x845	8016738753837
B 251/10/100 T	28FC441STN088	B2800	100	2/1,5	2	10/145	SI	1250	255/9	400/50	69/152,1	1025x435x845	8016738753820
B 345/10/100	28FC504STN089	B2800B	100	3/2,2	2	10/145	SI	1570	330/11,6	230/50	72/158,7	1025x435x845	8016738753813
B 345/10/100 T	28FC541STN090	B2800B	100	3/2,2	2	10/145	SI	1570	330/11,6	400/50	72,5/159,8	1025x435x845	8016738753806
B 345/10/200	28LC504STN158	B2800B	200	3/2,2	2	10/145	SI	1570	330/11,6	230/50	101/222,6	1435x475x1125	8016738762211
B 345/10/200 T	28LC541STN159	B2800B	200	3/2,2	2	10/145	SI	1570	330/11,6	400/50	102/224,9	1435x475x1125	8016738762228
B 395/10/200	36LC504STN160	B3800B	200	3/2,2	2	10/145	SI	1100	390/13,8	230/50	108/238,1	1435x475x1125	8016738762235
B 395/10/200 T	36LC541STN161	B3800B	200	3/2,2	2	10/145	SI	1100	390/13,8	400/50	109/240,3	1435x475x1125	8016738762242
B 475/10/200 T	36LC601STN162	B3800B	200	4/3,0	2	10/145	SI	1400	480/16,9	400/50	110/242,5	1435x475x995	8016738762259
B 475/10/270 T	36NC601STN163	B3800B	270	4/3,0	2	10/145	SI	1400	480/16,9	400/50	161/355	1640x560x1190	8016738762266

BELT DRIVEN SINGLE-STAGE COMPRESSORS

HIGHLIGHTS

Extremely reliable pump with cast iron cylinder. Wide finned surfaces for a better cooling. Oversized crankcase that guarantees an excellent lubrication.

Solid one-piece handle, fixed and skewed for an easier transportation.


Control panel integrated in the tank structure for a better protection. Oversized manometers placed on the compressor to guarantee an easy reading.

Ergonomic pressure reducer knobs equipped by an innovative "snap" adjustment mechanism.

Double caster wheels.

Oversized strong wheels that ensure high stability and easier transportation.

B 255/10/50



Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	WxDxH	
B 255/10/50	28DA404STN010	B2800B	50	2/1,5	2	10/145	SI	1250	255/9	230/50	51/112,4	800x390x750	8016738702699
B 350/10/50	28DA504STN011	B2800B	50	3/2,2	2	10/145	SI	1570	330/11,6	230/50	53/116,8	800x390x750	8016738702705

BELT DRIVEN SINGLE-STAGE COMPRESSORS

- Ideal for professional use, these compressors feature pump which, thanks to their excellent wear resistance, ensures a long life and extremely high reliability.
- Technical features on page 23.
- Available with three phase electric motor for heavy duty and extensive use.
- Four wheels, two of which are caster type, ensure easy transportation.



B 350/10/200



B 480/10/270 T



Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	WxDxH	
B 255/10/100	28FA404STN012	B2800B	100	2/1,5	2	10/145	SI	1250	255/9	230/50	67,5/148,8	1025x435x860	8016738702712
B 255/10/100 T	28FA441STN013	B2800B	100	2/1,5	2	10/145	SI	1250	255/9	400/50	68,5/151	1025x435x860	8016738702729
B 350/10/100	28FA504STN014	B2800B	100	3/2,2	2	10/145	SI	1570	330/11,6	230/50	73,5/162	1025x435x860	8016738702736
B 350/10/100 T	28FA541STN015	B2800B	100	3/2,2	2	10/145	SI	1570	330/11,6	400/50	74,5/164,2	1025x435x860	8016738702743
B 400/10/100	36FA504STN024	B3800B	100	3/2,2	2	10/145	SI	1100	390/13,8	230/50	80/176,3	1025x435x925	8016738702873
B 350/10/200	28LA504STN016	B2800B	200	3/2,2	2	10/145	SI	1570	330/11,6	230/50	107,5/237	1435x475x1150	8016738702750
B 350/10/200 T	28LA541STN017	B2800B	200	3/2,2	2	10/145	SI	1570	330/11,6	400/50	108/238	1435x475x1150	8016738702767
B 400/10/200	36LA504STN018	B3800B	200	3/2,2	2	10/145	SI	1100	390/13,8	230/50	113,5/250,2	1435x475x1150	8016738702774
B 400/10/200 T	36LA541STN019	B3800B	200	3/2,2	2	10/145	SI	1100	390/13,8	400/50	114/251,3	1435x475x1150	8016738702781
B 480/10/200 T	36LA601STN020	B3800B	200	4/3	2	10/145	SI	1400	480/16,9	400/50	125/275,5	1435x475x1150	8016738702798
B 480/10/270 T	36NA601STN021	B3800B	270	4/3	2	10/145	SI	1400	480/16,9	400/50	171/377	1640x560x1190	8016738702804